

Casing Spools

SW-22 casing spools feature a straight bore design that is compatible with slip and mandrel type casing hangers.

Features

- Features a 45° landing shoulder capable of supporting maximum loads
- Prevents test plugs from wedging under pressure

Outlets

- Line Pipe Outlets
- Studded Side Outlets

Casing Hanger Compatibility

- SW-21 and SW-22 slip-type casing hangers
- Mandrel style casing hangers

Manufacturing Standard

- API-6A

Availability

- Additional sizes available upon request
- Available in SW-29 profile upon request

Lock screws


- SW-22-BP casing heads are supplied with (2) lockscrews for wear bushing retention
- SW-22-L and SW-29-L casing head are supplied with a full set of lockscrews for mandrel casing hanger and packoff retention

Bottom Preparations

- PE/BG bottom for use with PE secondary seal (standard)
- HPE bottom, for use with HPE secondary seal bushing for high pressure applications
- Integral P or S seals



Casing Spools

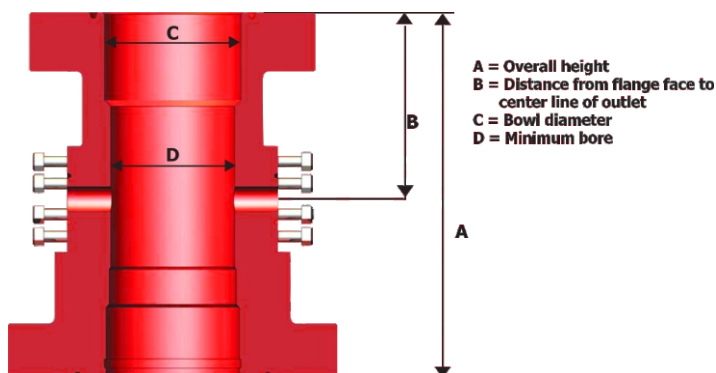

Specifications

Bottom Flange Size	Working Pressure	Top Flange Size	Working Pressure	Outlet	A	B	C	D	Part Number
11"	3,000	11"	3,000	2-1/16" Stdd	20-5/8"	10-1/4"	10-7/8"	10"	
11"	3,000	11"	5,000	2-1/16" Stdd	22-1/4"	12-3/4"	10-7/8"	10"	
11"	5,000	11"	5,000	2-1/16" Stdd	23-7/8"	12-3/4"	10-7/8"	10"	
11"	5,000	11"	10,000	1-13/16" Stdd	24-3/4"	13-5/8"	10-7/8"	10"	
11"	10,000	11"	10,000	1-13/16" Stdd	25-5/8"	14-1/2"	10-7/8"	10"	
13-5/8"	3,000	11"	3,000	2" LP	22-5/8"	10-1/4"	10-7/8"	10"	
13-5/8"	3,000	11"	3,000	2-1/16" Stdd	22-5/8"	10-1/4"	10-7/8"	10"	
13-5/8"	3,000	11"	5,000	2" LP	25-1/4"	12-3/4"	10-7/8"	10"	
13-5/8"	3,000	11"	5,000	2-1/16" Stdd	25-1/4"	12-3/4"	10-7/8"	10"	
13-5/8"	5,000	11"	5,000	2-1/16" Stdd	25-1/8"	12-3/4"	10-7/8"	10"	
13-5/8"	5,000	11"	10,000	1-13/16" Stdd	26"	13-1/2"	10-7/8"	10"	
21-1/4"	2,000	13-5/8"	3,000	2-1/16" Stdd	26-3/4"	10-5/8"	13-1/2"	12-1/2"	
20-3/4"	3,000	13-5/8"	3,000	1-13/16" Stdd	27-5/8"	10-5/8"	13-1/2"	12-1/2"	
20-3/4"	3,000	13-5/8"	5,000	2-1/16" Stdd	28-5/8"	12-1/8"	13-1/2"	12-3/8"	