

Tubing Heads (Spools)

SWECO's tubing heads feature a straight bore design for single and multiple completions. This design accepts all TC series tubing hangers and easily converts from a single completion to multiple completion with the addition and alignment pin or pins.

Features

Available Sizes

- Available with 7-1/16" nominal bowl
- Compatible with 7-5/8" production casing

Straight-Bore Design

- Features a 45° landing shoulder capable of supporting maximum loads

Outlets

- Line Pipe Outlets
- Studded Side Outlets

Manufacturing Standard

- API-6A (3M-5M)
- API-6A (10M)

Tubing Hanger Compatibility

- TCM tubing heads accept a wide variety of tubing hanger styles including mandrel and wraparound

Bottom Preparations


- PE/BG bottom, for use with PE secondary seal bushing (Standard)
- HPE bottom, for use with HPE secondary seal bushing or double P seal, both for high pressure applications (Available upon request)

Availability

- Additional sizes available upon request
- Available with ET (Integral) style lockscrews
- Flanged top Tubing Heads available with slip-on weld or threaded bottoms



Tubing Heads (Spools)

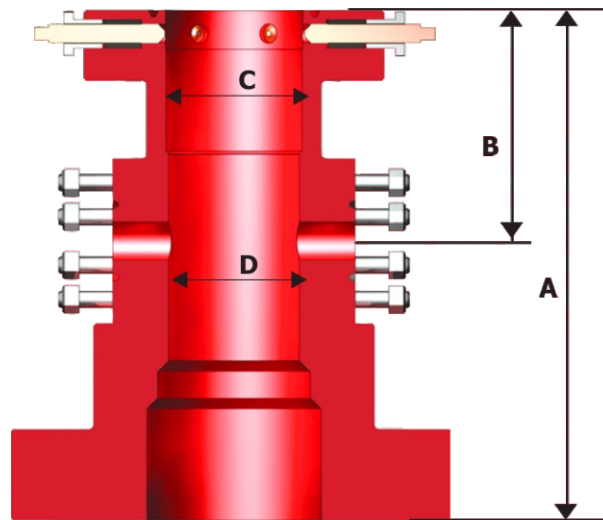

A = Overall height
B = Distance from flange face to center line of outlet
C = Bowl diameter
D = Minimum bore/Casing Size

Specifications

Bottom Flange	Working Pressure	Top Flange Size	Working Pressure	Outlet	A	B	C	D	Part Number
11"	2,000	7-1/16"	2,000	2" LP	16-3/4"	9-7/16"	7"	6-3/8"	
11"	3,000	7-1/16"	3,000	2-1/16" Stdd	17"	9-3/4"	7"	6-3/8"	
11"	3,000	7-1/16"	3,000	2-9/16" Stdd	17"	9-3/4"	7"	6-3/8"	
11"	3,000	7-1/16"	5,000	2-1/16" Stdd	17"	10-7/8"	7"	6-13/16"	
11"	3,000	7-1/16"	5,000	2-9/16" Stdd	17"	10-7/8"	7"	6-13/16"	
11"	5,000	7-1/16"	5,000	2-1/16" Stdd	19"	10-7/8"	7"	6-13/16"	
11"	5,000	7-1/16"	10,000	1-13/16" Stdd	19"	10-3/4"	7"	6-13/16"	
11"	10,000	7-1/16"	10,000	1-13/16" Stdd	24-1/4"	11"	7"	6-13/16"	
11"	10,000	7-1/16"	15,000	1-13/16" Stdd	26-1/2"	12-1/8"	7"	6-13/16"	